





L52 CLASSIC

Iconic 2-Way Bookshelf Loudspeaker

Package Contents

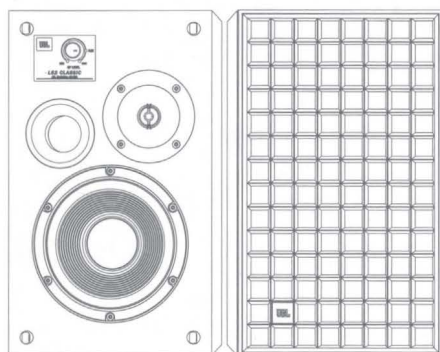

2 x Loudspeakers
2 x Quadrex Foam Grilles




1 x Quick Start Guide

Specifications


Type:	2-way bookshelf loudspeaker
Low Frequency Driver:	5.25" (133mm) Pure Pulp cone woofer (JW135PW-4)
High Frequency Driver:	0.75" (20mm) Titanium dome tweeter (JT020T11-4) with waveguide
Recommended Amplifier Power:	10 - 75 WRMS
Impedance:	4 Ohm
Loudspeaker Sensitivity:	85 dB/2.83V/1m
Frequency Response:	47 Hz - 24 kHz (-6 dB)
Crossover Frequency:	2.8 kHz
Enclosure:	Front-ported bookshelf in satin walnut furniture-grade wood veneer
Grille:	Foam Quadrex grille available in three colors: black, burnt orange and dark blue
Dimensions with grille:	13" H x 7.74" W x 8.51" D (330.2 mm x 196.6 mm x 216.2 mm)
Controls:	HF level control
Input Type:	Gold-plated binding posts
Product Weight (Each):	11 lbs. (5.0 kg)
Shipping Weight:	30.4 lbs. (13.8 kg)
Shipping Units of Measure:	Mirror-imaged stereo pair
Warranty:	5 Years
Recommended stand height:	24" (609 mm)
Wall bracket insert/spacing:	M6 x 1.0 thread, 12 mm max screw length / spaced 2.64" (67 mm) center-to-center

Placement and Positioning

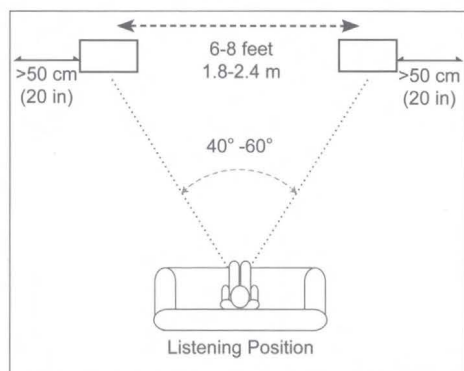

Note: The L52 Classic may be stand mounted with optional JBL metal stands (model JBL JS-65 sold separately)

Basic Single-Wire Connection

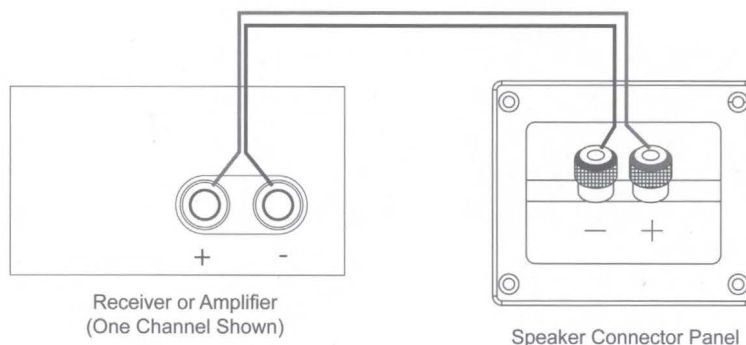


Manufacturer: Harman International Industries, Incorporated
Address: 8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES
European Representative: Harman International Industries, Incorporated
EMEA Liaison Office, Danzigerkade 16, 1013 AP Amsterdam, The Netherlands
Harman International Industries, Limited,
Ground Floor, Westside 2, London Road, Apsley, Hemel Hempstead, Hertfordshire,
HP3 9TD, United Kingdom

www.jbl.com/SPECIALITYAUDIO

QUICK START GUIDE

Dimensions

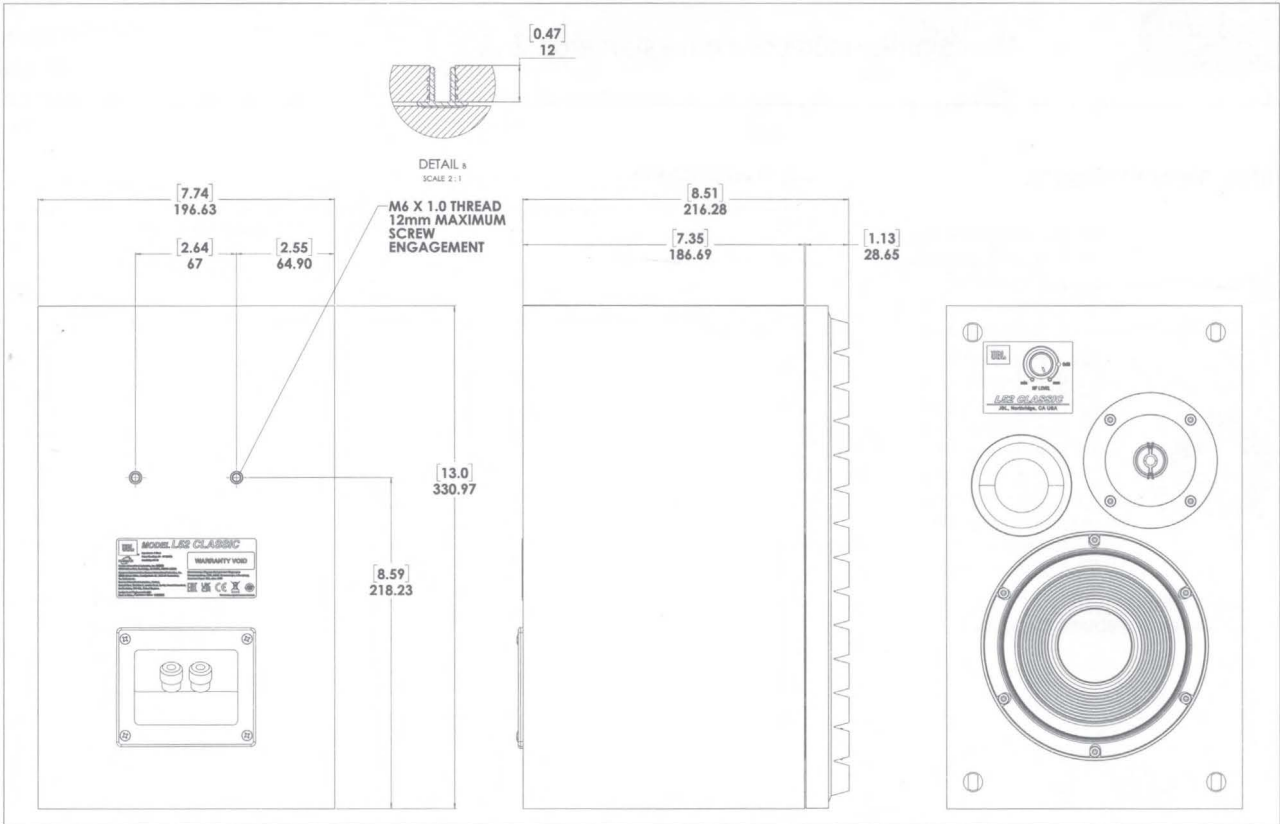

ENGLISH

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Clean only with a dry cloth.
6. Do not block any ventilation openings. Install this apparatus in accordance with the manufacturer's instructions.
7. Do not install this apparatus near any heat sources such as radiators, heat registers, stoves or other apparatus (including amplifiers) that produce heat.
8. Use only attachments/accessories specified by the manufacturer.
9. Use only with the cart, stand, tripod, bracket or table specified by the manufacturer or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
10. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, or the apparatus has been exposed to rain or moisture, does not operate normally or has been dropped.



Correct disposal of this product (Waste Electrical & Electronic Equipment)

This symbol means the product must not be discarded as household waste, and should be delivered to an appropriate collection facility for recycling. Proper disposal and recycling helps protect natural resources, human health and the environment. For more information on disposal and recycling of this product, contact your local municipality, disposal service, or the shop where you bought this product.



RoHS

This product is RoHS compliant.

This product is in compliance with Directive 2011/65/EU, and its amendments, on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

REACH

REACH (Regulation No 1907/2006) addresses the production and use of chemical substances and their potential impacts on human health and the environment. Article 33(1) of REACH Regulation requires suppliers to inform the recipients if an article contains more than 0.1 % (per weight per article) of any substance(s) on the Substances of Very High Concern (SVHC) Candidate List ('REACH candidate list'). This product contains the substance "lead" (CAS-No. 7439-92-1) in a concentration of more than 0.1% per weight.

At the time of release of this product, except for the lead substance, no other substances of REACH candidate list are contained in a concentration of more than 0.1% per weight in this product.

Note: On June 27, 2018, lead was added to the REACH candidate list. The inclusion of lead in the REACH candidate list does not mean that lead-containing materials pose an immediate risk or results in a restriction of permissibility of its use.

PORTUGUÊS (BRASIL)

IMPORTANTE: INSTRUÇÕES DE SEGURANÇA

1. Leia as instruções.
2. Guarde os manuais em um lugar seguro.
3. Observe todas as advertências.
4. Siga todas as instruções.
5. Limpe o equipamento apenas com pano seco.
6. Não bloqueie nenhuma abertura de ventilação. Instale o produto de acordo com as instruções do fabricante.
7. Nunca instale o produto próximo a fontes de calor como radiadores, aquecedores, fornos ou outros equipamentos que produzam calor, incluindo amplificadores.
8. Use apenas equipamentos e acessórios aprovados pelo fabricante.
9. Use apenas carrinhos, suportes, tripés, estantes ou mesas indicadas pelo fabricante ou vendidas junto com o produto. Se usar um carrinho, tome cuidado ao movê-lo para que a caixa não caia e cause lesões em pessoas ao redor.
10. Toda manutenção deve ser feita por uma assistência técnica qualificada. Procure a assistência técnica se o equipamento sofrer qualquer tipo de dano, tais como danos ao cabo de energia ou à tomada, derramamento de líquidos ou queda de objetos em seu interior, exposição a chuva ou umidade, funcionamento anormal ou quedas.



Modo de descartar o produto (procedimentos para resíduos eletroeletrônicos)

Este símbolo significa que o produto não pode ser descartado no lixo comum e deve ser entregue a um centro de reciclagem capaz de processá-lo. O descarte e a reciclagem ajudam a proteger os recursos naturais, a saúde humana e o meio ambiente. Para saber mais sobre como descartar e reciclar o produto, procure as autoridades locais, o serviço de coleta de lixo ou a loja onde o produto foi adquirido.



RoHS

Este produto atende às normas RoHS.

Este produto está de acordo com a Diretiva 2011/65/UE e as respectivas emendas, que determinam restrições ao uso de determinadas substâncias perigosas em equipamentos eletroeletrônicos.

REACH

O Regulamento REACH (nº. 1907/2006) dispõe sobre a produção e o uso de substâncias químicas e seus possíveis impactos sobre a saúde humana e o meio ambiente. O Artigo 33(1) do Regulamento REACH requer que os fornecedores informem a presença de excipientes cujo teor for superior a 0,1 % (por peso por artigo) de quaisquer substâncias constantes da Lista de Substâncias Candidatas que Suscitam Elevada Preocupação (SVHC, "Substances of Very High Concern") ("lista de candidatos REACH"). Este produto contém a substância "chumbo" (nº CAS 7439-92-1) em concentração superior a 0,1% por peso.


No momento em que foi liberado, este produto não continha, além do chumbo, nenhuma outra substância constante da lista de candidatos REACH em concentração superior a 0,1% por peso.

Observação: O chumbo foi adicionado à lista de candidatos do Regulamento REACH em 27 de junho de 2018. A inclusão do chumbo na lista de candidatos REACH não significa que os materiais que contêm chumbo ofereçam risco imediato nem implica em restrição das utilizações permitidas dos referidos materiais.

Gold-plated Binding Post


USING BARE WIRE OR PIN CONNECTORS:

IMPORTANT: Make sure that the (+) and (–) wires or pins do not touch each other or the other terminal. Touching cables can cause a short circuit that can damage your receiver or amplifier.

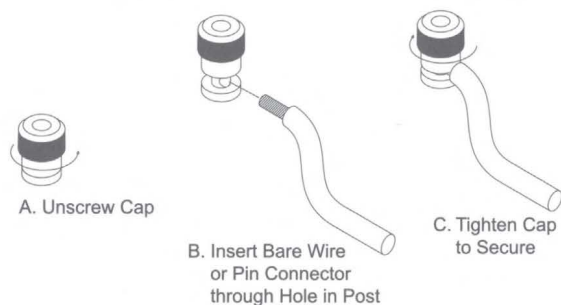


USING SPADE CONNECTORS:

IMPORTANT: Make sure the (+) and (–) spade connector blades do not touch each other or the other terminal. Touching blades can cause a short circuit that can damage your receiver or amplifier.

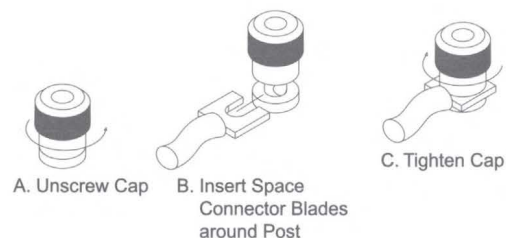

USING BANANA CONNECTORS:

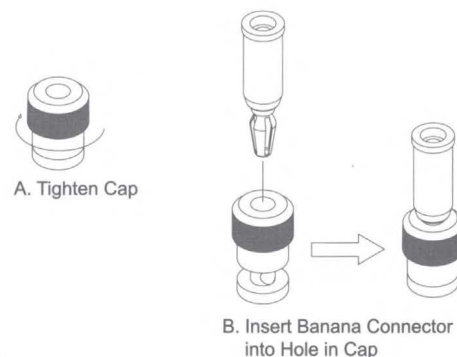

Controls/Adjustments



NOTE: As with most speakers, the L52Classic has transducers whose suspensions will take several weeks to "break in" and achieve optimum performance. During this period, the balance between woofer and tweeter may change, so we recommend that you adjust the tweeter controls again after the break-in period.